


# REF : FHP

High quality loudspeaker cable

Ed. 6 11/08 TM

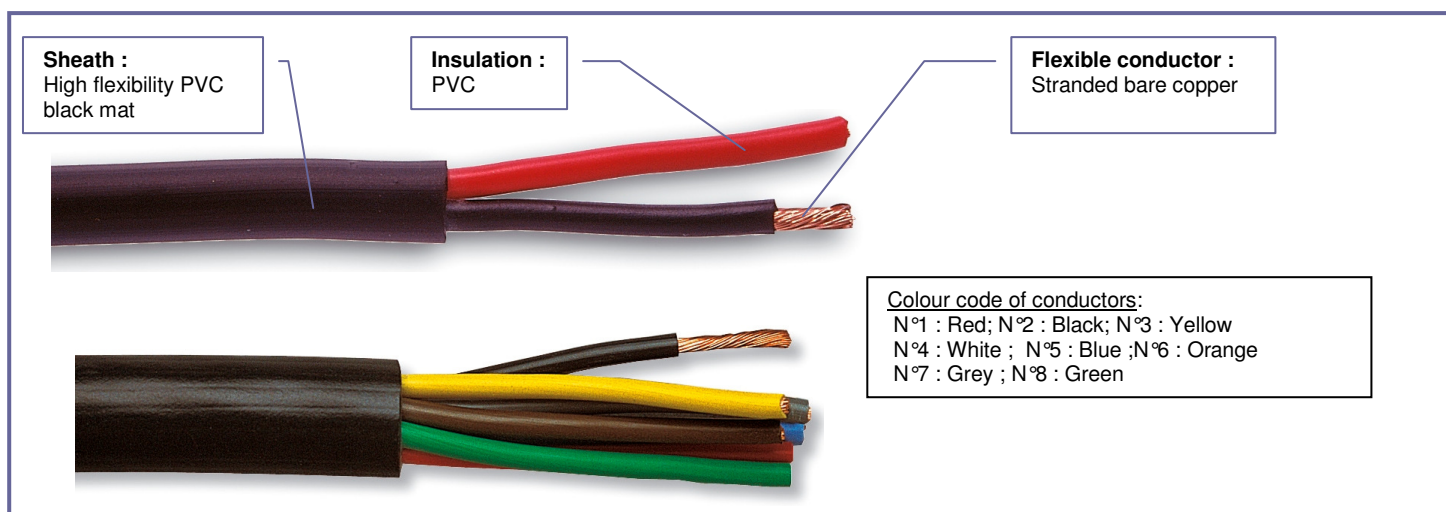

## PRODUCTS INFORMATIONS

### Application

Wiring all types of sound systems.  
Connect amplifiers and loudspeakers.  
For fixed and mobile installations.  
Public address.

### Electrical properties

Max. voltage : **300 V**

Test voltage (50 Hz – 1 min) : **> 2000 V**

Conductor resistance at 20 °C :

Section 1,5 mm<sup>2</sup> : **< 13,3 Ω/km**

Section 2,5 mm<sup>2</sup> : **< 7,98 Ω/km**

Section 4 mm<sup>2</sup> : **< 4,95 Ω/km**

Insulation resistance at 20 °C : **> 100 MΩ.km**

### Characteristics



Temperature range :  
**Fixed use : - 20 °C → + 70 °C**  
**Mobile use : - 10 °C → + 70 °C**



Minimum bending radius :  
**Fixed use : 5 x Ø**  
**Mobile use : 10 x Ø**



Conform to RoHS directive

### Products references

			
FHP 215	2 x 1,5	6,2	60
FHP 225	2 x 2,5	7,4	87
FHP 425	4 x 2,5	10,25	160
FHP 525	5 x 2,5	10,8	205
FHP 625	6 x 2,5	13,0	260
FHP 825	8 x 2,5	15,8	350
FHP 2400	2 x 4,0	10,2	130
FHP 4400	4 x 4,0	12,2	260
FHP 8400	8 x 4,0	18,5	582